



**Eco-King Stainless Electric Hot Water Heaters
Submittal Sheet**

Job Name: _____ **Date:** _____

Location: _____

Engineer: _____

Contractor: _____

Model Number: _____


Product Features:

- Everlast titanium alloy Stainless Steel tank with energy efficient Nanopur insulations for minimal heat loss
- UL Listed according to CSA 22.2 No 110-94
- Single or dual elements 3 or 4.8kw
- Aluminum anode, 125psi T&P, adjustable mixing valve and drain valve all installed and included in all tanks
- Ability to store tank to 170 degrees, which provides high volumes of hot water


MODELS	CAPACITY usg	# elements and wattage	Voltage	Full load current in Amps	Dimensions: h x w inches	Hot and cold inlets
S3 52	52	1 / 3kw	240v	17	50 x 25	3/4"
SX3 52	52	2 / 3kw	240v	23	50 x 25	3/4"
S5 52	52	1 / 5kw	240v	17	50 x 25	3/4"
SX5 52	52	2 / 5kw	240v	23	50 x 25	3/4"
S3 80	80	1 / 3kw	240v	17	67 x 25	3/4"
SX3 80	80	2 / 3kw	240v	23	67 x 25	3/4"
S5 80	80	1 / 5kw	240v	17	67 x 25	3/4"
SX5 80	80	2 / 5kw	240v	23	67 x 25	3/4"

ECO-KING

Side View

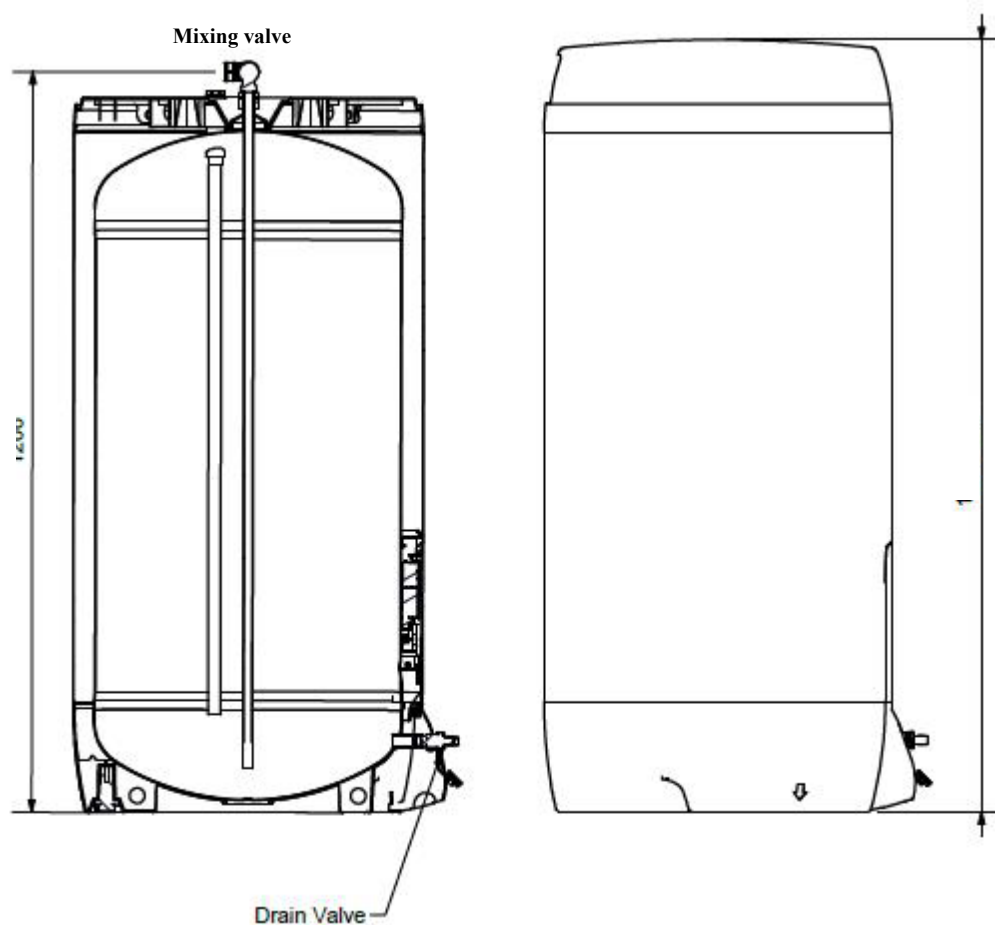

Top View

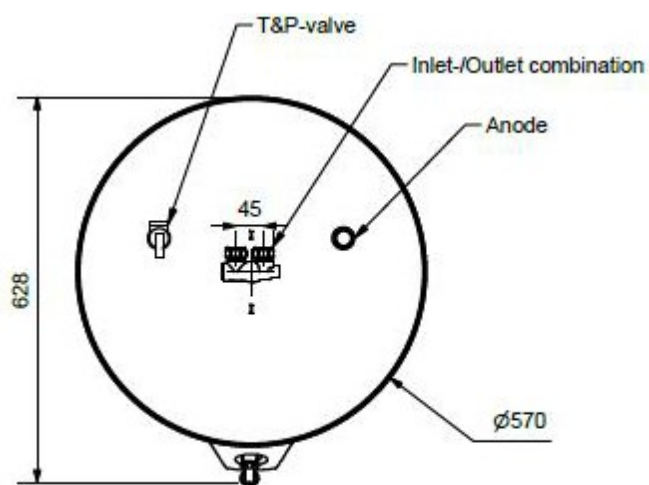

For more information visit:

www.kingheatingproducts.com or email sales@ecokingheating.com