

ECO-KING

King Heating Products Inc.

WWW.ECOKINGHEATING.COM

ECO-KING

High Efficient Unit Heater




- ⇒ High Efficient Unit Heater
- ⇒ Energy Savings up to 25% of Conventional Heaters
- ⇒ Modulating Burner & System Fan for Higher Comfort
 - ⇒ Temp Control for optimal air circulation
 - ⇒ Compact Design and Light Weight
 - ⇒ Easy to Install
- ⇒ Unique Stainless Steel Heat Exchanger
- ⇒ Modulating Clock Thermostats for 1-8 Heaters
- ⇒ Fault indicator and reset function on the clock
- ⇒ Low Voltage connection to thermostat

WWW.ECOKINGHEATING.COM


High Efficient Condensing Unit Specifications:

Commercial name	HR50	HR75	HR115	HR150	HR190	HR250
Btu (nom)	47.000	76.000	114.000	151.000	189,000	227.000
Btu (min)	15.000	23.000	34.000	45.000	57.000	68.000
Eff @ max (%)	87,1	91,0	87,7	91,6	87,0	91,0
Eff @ min. (%)	95,8	95,8	96,7	96,7	95,5	95,5
Amps @ 115Vac (A)	4,9	4,9	7,0	7,0	7,1	7,1
Air output (cfm)	1200	1500	1800	2600	2900	3500
m3/hr	4.500	4.500	5.000	5.000	6.000	6.000
Throw (ft)	85	85	92	92	98	98
m3/hr	26	26	28	28	30	30
Gas connection G"	½" in	½" in	½" in	½" in	½" in	½" in
Flue length max (ft)	30	30	30	30	30	30
Weight (lbs)	187	187	231	231	243	243
Sound level (average @ 13 ft (4m)) (dBA)	47	47	48	48	49	49

HR 50 & 75

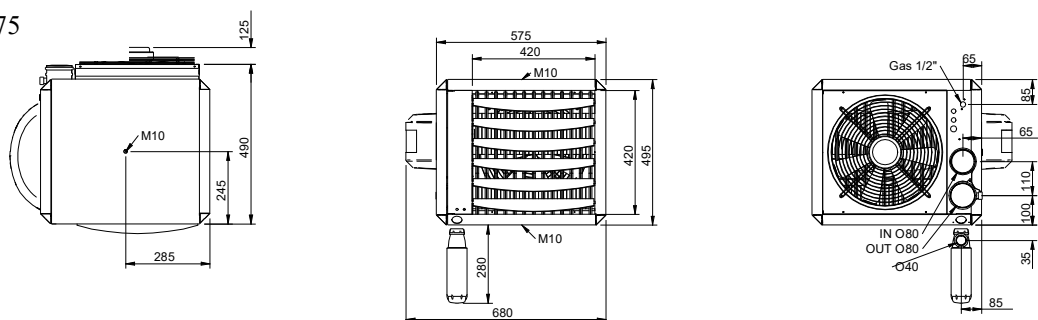

HR 115 & 150

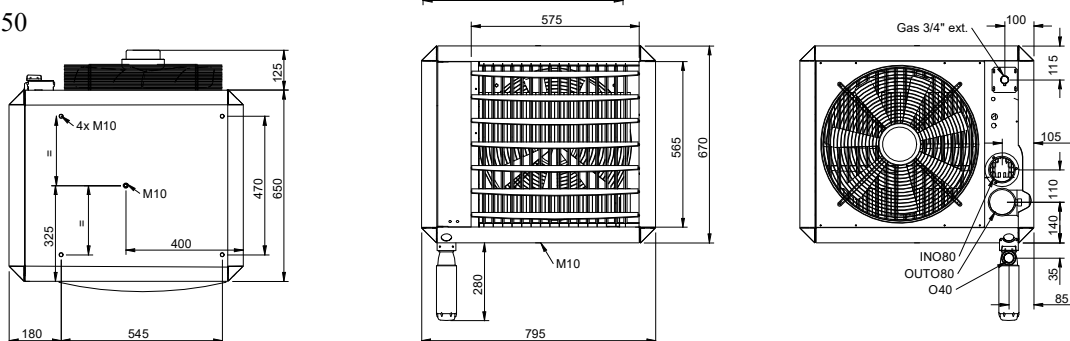

HR 150, 190 & 250

